

The logo for FIBRAMÉRICA, featuring the word in a blue, sans-serif font with a subtle drop shadow.

FIBRAMÉRICA

The text 'FIBER OPTIC CABLES' in a bold, blue, sans-serif font, positioned in the lower-left area of the slide.

**FIBER OPTIC
CABLES**





FIBRAMÉRICA

MINQING FIBRAMERICA TECHNOLOGY

Complete solutions for the intelligent development of fiber optic networks

Minqing Fibramerica Technology, under its trade name FIBRAMÉRICA, is one of the world's leading companies dedicated to the design, development, manufacture, distribution and marketing of advanced optical connectivity solutions. We work closely with the main players in the telecommunications market, such as operators, distributors and importers and installers all over the world, both as OEMs and under our own brand.

Its headquarters are located in Fuzhou, Fujian, China, with sales offices in Shanghai and Ningbo. It also has direct sales units in America, located in Brazil, where all commercial and technical support is provided in Spanish through its engineers and sector specialists. This expansion not only demonstrates its global vision, but also reflects its commitment to localized customer service, providing commercial and technical assistance in the same time zone and language as our customers.

On its path to excellence, FIBRAMÉRICA has adopted a continuous focus on improving processes, integrating emerging technologies and implementing effective communication strategies. Their dedication translates into competitive prices, efficient production times and comprehensive support, from the manufacturing process to product transportation.

Following the strictest international quality norms and standards, such as ISO9001, it guarantees that each of its products meets the quality and functionality expectations of the most demanding customers.

With a vision of the future, FIBRAMÉRICA focuses its efforts on developing and adapting new products, tailored to the specificities and needs of each project, from the initial design stage to final production.





FIBER OPTIC CABLES

Fibramérica supplies fiber optic cables for external and internal installation applications, manufactured in accordance with international quality standards and norms. Fibramérica supplies fiber optic cables for internal and external installation applications, manufactured in accordance with international standards and quality norms.

Fiber optic cables are composed of glass filaments, each capable of transmitting digital data modulated in light waves. They efficiently send encoded information in a beam of light through a glass tube.


Fibramérica's cable catalog includes cables for overhead, subway and direct burial, with metallic or dielectric structures, in different configurations according to the project's needs.



The fibers used in each cable can be single-mode (G652D, G657A1, G657A2 and G657B3), as well as multimode (OM1, OM2, OM3 and OM4).

All cables are designed and manufactured in accordance with international standards, under strict quality controls.

Some of Fibramérica's most popular cable models are self-supporting dielectric cables (ADSS and ASU), armored cables (GYTS, GYTA, GYXTW) and drop cables in messenger (outer) and messengerless (inner) versions.

Fibramérica provides cables with customized marking of its products (OEM).

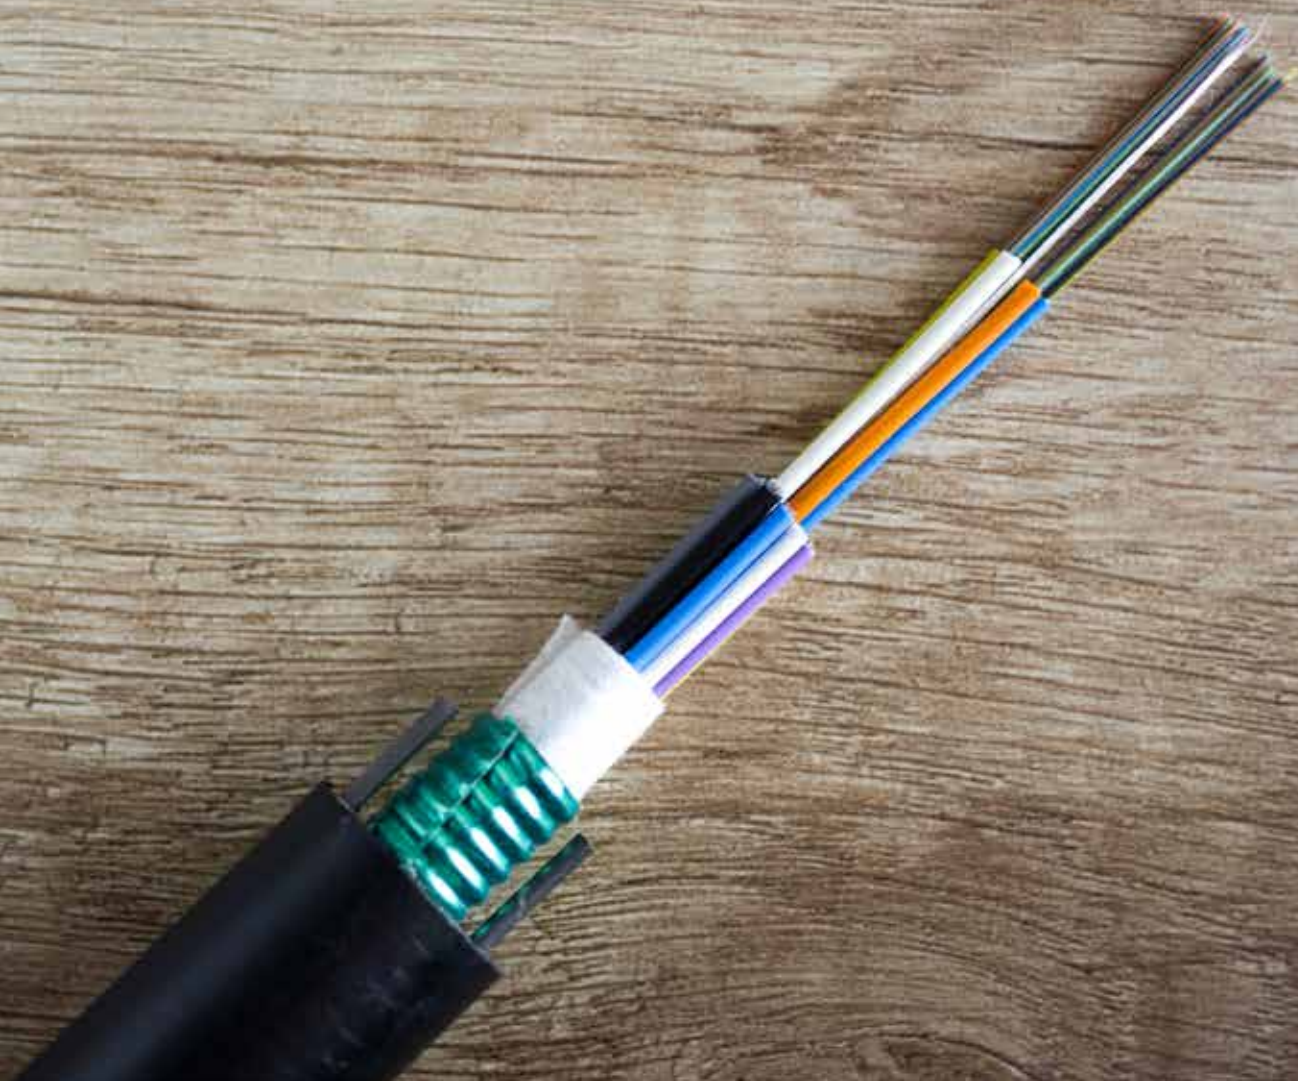

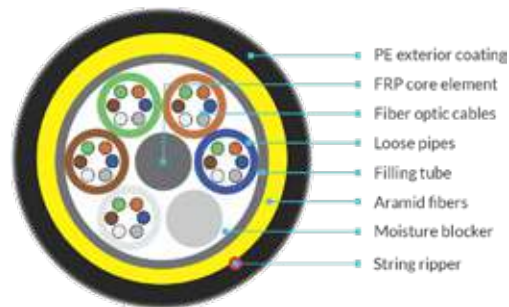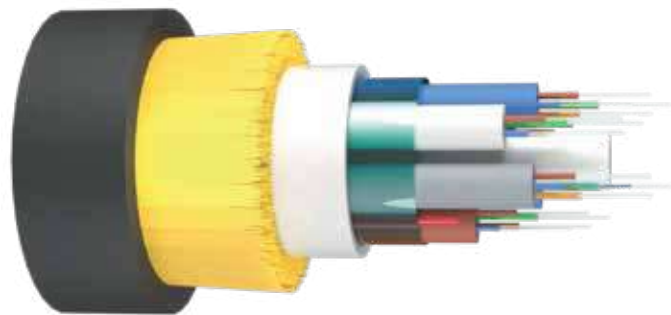

Items		Unit	Cable type					
Threshold		m	100	200	300	400	500	600
Outside diameter		mm	11.6	12.0	12.3	12.5	12.8	13.8
Weight	PE sheath	Kg/km	124.2	131.1	136.3	141.4	146.5	165.9
	AT sheath		132.6	139.9	145.3	150.7	156.0	176.3
Cross-sectional area		mm ²	105.68	112.70	117.9	123.07	128.19	150.21
Traction member area		mm ²	5.67	10.20	13.62	17.02	20.43	26.10
RTS		KN	8.50	15.30	20.40	25.50	30.60	39.10
MOTS		KN	3.40	6.12	8.16	10.20	12.24	15.64
EDS		KN	2.13	3.83	5.10	6.38	7.65	9.78
Maximum exceptional stress		KN	5.10	9.18	12.24	15.30	18.36	23.46
Modules		KN/mm ²	8.44	12.52	15.27	17.79	20.11	21.71
Coefficient of thermal expansion		10 ⁻⁶ / °C	9.32	5.28	3.78	2.80	2.12	1.42
Crushing force	Operation	N/10cm	1000	1000	1000	1000	1000	1000
	Installation	N/10cm	2200	2200	2200	2200	2200	2200
Safety factor			2.5	2.5	2.5	2.5	2.5	2.5
Minimum bending radius	Operation	mm	174	180	185	188	192	207
	Installation	mm	290	300	308	313	320	345
Temperature	Operation	°C	-10+60	-10+60	-10+60	-10+60	-10+60	-10+60
	Transportation	°C	-40+70	-40+70	-40+70	-40+70	-40+70	-40+70
	Operation	°C	-40+70	-40+70	-40+70	-40+70	-40+70	-40+70
Sag (5mm Lce Load, Average 20°C)	PE	%	0.72	0.84	1.6	1.28	1.47	1.57
	AT		0.76	0.90	1.12	1.35	1.54	1.63

Important: All cables can be adjusted according to the need of each project. Please consult with one of our specialists for the best cable option.

Description

The ADSS optical cable is a fully dielectric self-supporting cable for external installation which, depending on the type of configuration, can support spans of up to 800 meters without the use of messenger cables. It is currently the most widely used cable, in its different versions, for the construction of backbone networks and is mainly installed in existing 220 kV or lower voltage power lines.



The cable can have one or two medium or high density polyethylene sheaths, maximum capacity of up to 288 fibers and its accommodation is in wooden reels of up to 4km or 5km, depending on the cable model.

Features

- Precise control of excess fiber length to prevent fibers from becoming taut when the rope is subjected to maximum design load.
- Precise control of release tension and aramid yarn placement to improve cable tensile strength.
- Use of high quality materials to provide an efficient and safe environment.
- Special ADSS cables can be designed on request.

Standards

The cable complies with the IEEE 1222-2004 standard as well as IEC 6079-1.

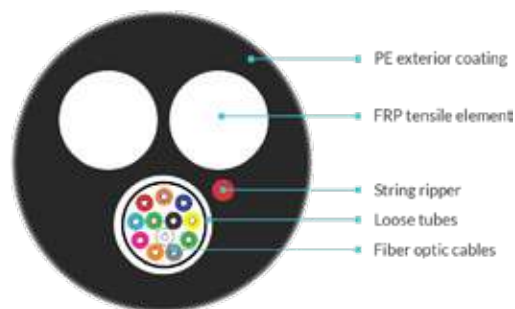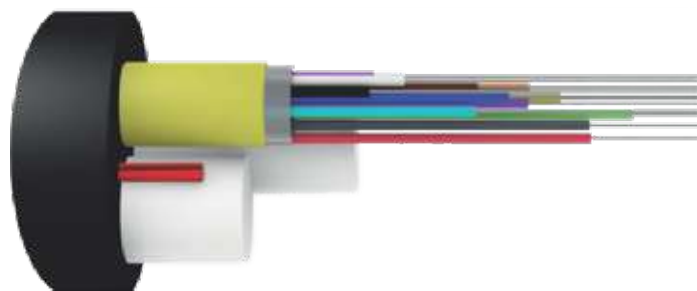

Description

FAB-ASU cable is a fully dielectric, self-supporting, single loose tube cable with water blocking gel, widely used in outside plant for optical distribution. In short runs (80 to 120 meters), ASU cable is an economical alternative to ADSS cable.

It has a medium-density polyethylene jacket, reduced diameter and capacity to support up to 24 fibers in its single loose tube. It consists of two parallel FRP elements that act as supporting elements supporting spans of up to 200 meters.

The outer jacket is made of PE which, depending on the requirement, can change the outer diameter. In addition, its design minimizes wind and ice loads, is quick to install and easy to transport.

SPAM 80m		unit					
Amount of fiber	Nº	6		12		24	
Cable model		FAB-ASU-6-80	FAB-ASU-6-80A	FAB-ASU-12-80	FAB-ASU-12-80A	FAB-ASU-24-80	FAB-ASU-24-80A
FRP reinforcement diameter	±0.1 mm	1.5mm	2mm	1.5mm	2mm	1.5mm	2.5mm
Number of FRP reinforcements	Nº	2		2		2	
Loose tube diameter PBT	±0.1 mm	1.8mm		2mm		2.4mm	
Number of loose tubes	Nº	1		1		1	
Water blocking threads	D	2000		2000		2000	
Tear threads	Nº	1		1		1	
Cable diameter	±0.1 mm	6.2mm	6.5mm	6.5mm	6.6mm	7.2mm	8mm
SPAM 120m		unit					
Amount of fiber	Nº	6		12		24	
Cable model		FAB-ASU-6-120	FAB-ASU-6-120A	FAB-ASU-12-120	FAB-ASU-12-120A	FAB-ASU-24-120	FAB-ASU-24-120A
FRP reinforcement diameter	±0.1 mm	2.0mm	2.0mm	2.0mm	2.0mm	2.0mm	2.6mm
Number of FRP reinforcements	Nº	2		2		2	
Loose tube diameter PBT	±0.1 mm	1.8mm		2mm		2.4mm	
Number of loose tubes	Nº	1		1		1	
Water blocking threads	D	2000		2000		2000	
Tear threads	Nº	1		1		1	
Cable diameter	±0.1 mm	6.2mm	7.5mm	6.5mm	7.5mm	7.2mm	8.5mm

Important: All cables can be adjusted according to the need of each project. Please consult with one of our specialists for the best cable option.



Features

- Single-mode optical fiber type G.652D
- Outer sheath: MDPE (Medium Density Polyethylene)
- Operating Temperature: -20°C ~ +65°C
- Maximum Span (Distance between Poles): 200 meters
- Protection against UV rays and humidity
- Variable diameter according to fiber quantity and project criteria.

Standards

The cable complies with the IEEE 1222-2004 standard as well as IEC 6079-1.

Important: All cables can be adjusted according to the need of each project. Please consult with one of our specialists for the best cable option.

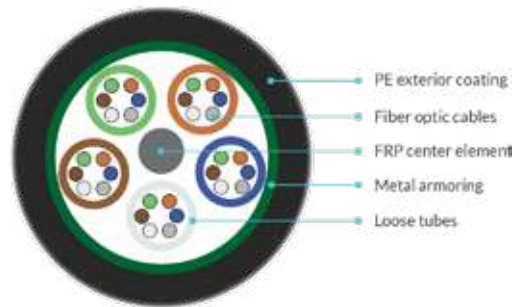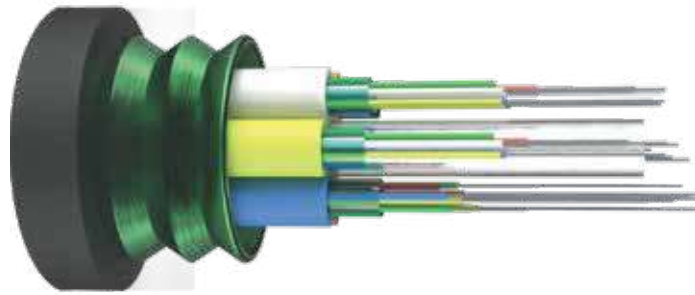

Code	Number of fibers	Tubes	Fillings	Cable diameter (mm)	Cable weight (kg/Km)	Traction force Long/Short term (N)	Crush resistance Long/Short term (N/1000mm)	Bending radius Dynamic / Static (mm)
FAB-GTYS-2-6	2-6	1	4	8.9	78/88	600/1500	300/1000	10D/20D
FAB-GTYS-8-12	8-12	2	3	8.9	78/88	600/1500	300/1000	10D/20D
FAB-GTYS-14-18	14-18	3	2	8.9	78/88	600/1500	300/1000	10D/20D
FAB-GTYS-20-24	20-24	4	1	8.9	78/88	600/1500	300/1000	10D/20D
FAB-GTYS-26-30	26-30	5	0	8.9	78/88	600/1500	300/1000	10D/20D
FAB-GTYS-32-36	32-36	6	0	9.2	82/87	600/1500	300/1000	10D/20D
FAB-GTYS-38-48	38-48	4	1	9.5	82/87	600/1500	300/1000	10D/20D
FAB-GTYS-50-60	50-60	5	0	9.5	82/87	600/1500	300/1000	10D/20D
FAB-GTYS-62-72	62-72	6	0	10.0	98/114	600/1500	300/1000	10D/20D
FAB-GTYS-74-84	74-84	7	1	11.2	110/129	600/1500	300/1000	10D/20D
FAB-GTYS-86-96	86-96	8	0	11.2	112/129	600/1500	300/1000	10D/20D
FAB-GTYS-98-108	98-108	9	1	12.5	137/161	600/1500	300/1000	10D/20D
FAB-GTYS-110-120	110-120	10	0	12.5	137/161	600/1500	300/1000	10D/20D
FAB-GTYS-122-132	122-132	11	1	13.8	163/189	600/1500	300/1000	10D/20D
FAB-GTYS-134-144	134-144	12	0	13.8	163/189	600/1500	300/1000	10D/20D

Transporte / Almacenamiento / Temperatura de funcionamiento - 40 °C~ + 70 °C,

Description

FAB-GTYS aerial cable with metallic armor is designed for different outdoor applications, both in ducts and aerial for non-self-supporting applications. Its main feature is that it has a steel tape that protects the cable against humidity, provides rigid protection, rodent resistance, covered by a black polyethylene jacket.

In FAB-GTYS cable, the fibers are placed in loose tubes that are filled with a water-blocking filling compound. The tubes and fillers are braided around the reinforcing member in a circular cable core.



Features

- Excellent crush resistance and flexibility
- Up to 288 fiber capacity
- Loose gel-filled tubes for superior water-resistant performance
- Moisture-resistant corrugated steel tape protects cable from mechanical and rodent damage.

Standards

The cable complies with the IEEE 1222-2004 standard as well as IEC 6079-1.

Double Sheathed Outdoor Armored Cable FAB-GYTY53

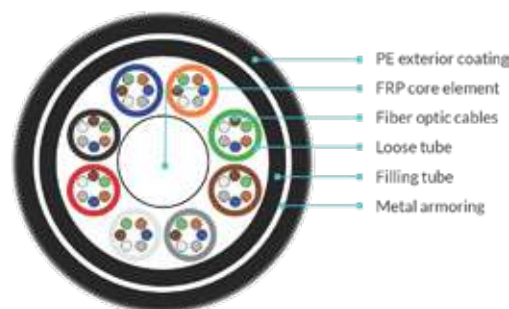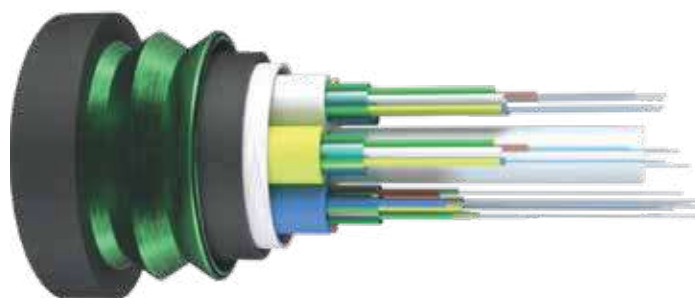

Code	Number of fibers	Tubes	Fillings	Cable diameter (mm)	Cable weight (kg/Km)	Traction force Long/Short term (N)	Crush resistance Long/Short term (N/1000mm)	Bending radius Dynamic / Static (mm)
FAB-GYTY53-2-6	2-6	1	4	10.3	114	1000/3000	1000/3000	25D/12.5D
FAB-GYTY53-8-12	8-12	2	3	10.3	114	1000/3000	1000/3000	25D/12.5D
FAB-GYTY53-14-18	14-18	3	2	10.3	114	1000/3000	1000/3000	25D/12.5D
FAB-GYTY53-20-24	20-24	4	1	10.3	114	1000/3000	1000/3000	25D/12.5D
FAB-GYTY53-26-30	26-30	5	0	10.3	114	1000/3000	1000/3000	25D/12.5D
FAB-GYTY53-32-36	32-36	6	0	10.6	123	1000/3000	1000/3000	25D/12.5D
FAB-GYTY53-38-48	38-48	4	1	10.9	125	1000/3000	1000/3000	25D/12.5D
FAB-GYTY53-50-60	50-60	5	0	10.9	125	1000/3000	1000/3000	25D/12.5D
FAB-GYTY53-62-72	62-72	6	0	11.4	143	1000/3000	1000/3000	25D/12.5D
FAB-GYTY53-74-84	74-84	7	1	12.6	162	1000/3000	1000/3000	25D/12.5D
FAB-GYTY53-86-96	86-96	8	0	12.6	162	1000/3000	1000/3000	25D/12.5D
FAB-GYTY53-98-108	98-108	9	1	13.8	190	1000/3000	1000/3000	25D/12.5D
FAB-GYTY53-110-120	110-120	10	0	13.8	190	1000/3000	1000/3000	25D/12.5D
FAB-GYTY53-122-132	122-132	11	1	15.2	225	1000/3000	1000/3000	25D/12.5D
FAB-GYTY53-134-144	134-144	12	0	15.2	225	1000/3000	1000/3000	25D/12.5D

Transport / Storage / Operating temperature - 40 °C~ + 70 °C,

Description

The FAB-GYTY53 double sheathed metallic armored aerial cable is designed for different outdoor applications, either for aerial, direct buried or duct laying. Its main advantage is its robust design, which provides better behavior against crushing or impact.

It has a steel tape that protects the cable against humidity, provides rigid protection, rodent resistance, covered by a black polyethylene jacket. The double jacket system increases the degree of protection of the fiber optic cable core in case it is damaged by rodent attack, for example.

In the FAB-GYTS cable, the fibers are placed in loose tubes that are filled with a water-blocking filling compound. The tubes and fillers are braided around the reinforcing member in a circular cable core.


Features

- Excellent crush resistance and flexibility
- Up to 288 fiber capacity
- Loose gel-filled tubes for superior water-resistant performance
- Moisture-resistant corrugated steel tape protects cable from mechanical and rodent damage.

Standards

The cable complies with YD/T 901-2009 standard as well as IEC 60794-1.

Important: All cables can be adjusted according to the need of each project. Please consult with one of our specialists for the best cable option.

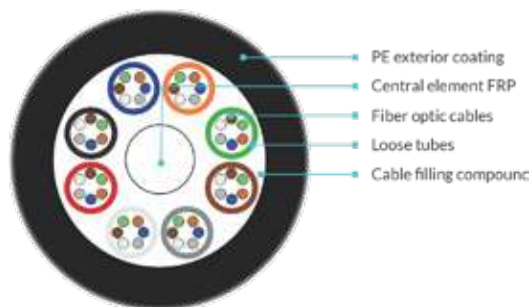

Code	Number of fibers	Tubes	Fillings	Cable diameter (mm)	Cable weight (kg/Km)	Traction force Long/Short term (N)	Crush resistance Long/Short term (N/1000mm)	Bending radius Dynamic / Static (mm)
FAB-GYFTY-2-6	2-6	1	5	8.3	59	600/1500	300/1000	20D/10D
FAB-GYFTY-8-12	8-12	2	4	8.3	59	600/1500	300/1000	20D/10D
FAB-GYFTY-14-18	14-18	3	3	8.3	59	600/1500	300/1000	20D/10D
FAB-GYFTY-20-24	20-24	4	2	8.3	59	600/1500	300/1000	20D/10D
FAB-GYFTY-26-30	26-30	5	1	8.3	59	600/1500	300/1000	20D/10D
FAB-GYFTY-32-36	32-36	6	0	8.3	59	600/1500	300/1000	20D/10D
FAB-GYFTY-38-48	38-48	4	1	9.0	67	600/1500	300/1000	20D/10D
FAB-GYFTY-50-60	50-60	5	0	9.0	67	600/1500	300/1000	20D/10D
FAB-GYFTY-62-72	62-72	6	0	9.0	67	600/1500	300/1000	20D/10D
FAB-GYFTY-74-84	74-84	7	1	10.2	82	600/1500	300/1000	20D/10D
FAB-GYFTY-86-96	86-96	8	0	10.2	82	600/1500	300/1000	20D/10D
FAB-GYFTY-98-108	98-108	9	1	11.4	101	600/1500	300/1000	20D/10D
FAB-GYFTY-110-120	110-120	10	0	11.4	101	600/1500	300/1000	20D/10D
FAB-GYFTY-122-132	122-132	11	1	12.8	125	600/1500	300/1000	20D/10D
FAB-GYFTY-134-144	134-144	12	0	12.8	125	600/1500	300/1000	20D/10D

Transport / Storage / Operating temperature - 40 °C~ + 70 °C,

Description

FAT-GYFTY cable is ideally designed for outdoor installations, whether for laying in pipelines and overhead power systems, multiple lightning strikes and severe electromagnetic interference conditions, and can also be used as an optical access cable.


It has a fully dielectric structure, consisting of a PE jacket and loose tubes containing fiber inside. In the middle of the cable, an FRP tensile element articulates the cable configuration. This type of cable offers excellent tensile strength and flexibility in a compact size. It offers excellent optical transmission and physical performance.

Features

- Low dispersion and attenuation
- Light weight and small diameter, easy to place
- Excellent mechanical and temperature performance
- FRP ensuring resistance to electromagnetic interference
- High strength loose tube resistant to hydrolysis
- Special tube filling compound ensures critical fiber protection
- 100% cable core filling

Standards

The cable complies with YD/T 901-2009 standard as well as IEC 60794-1.

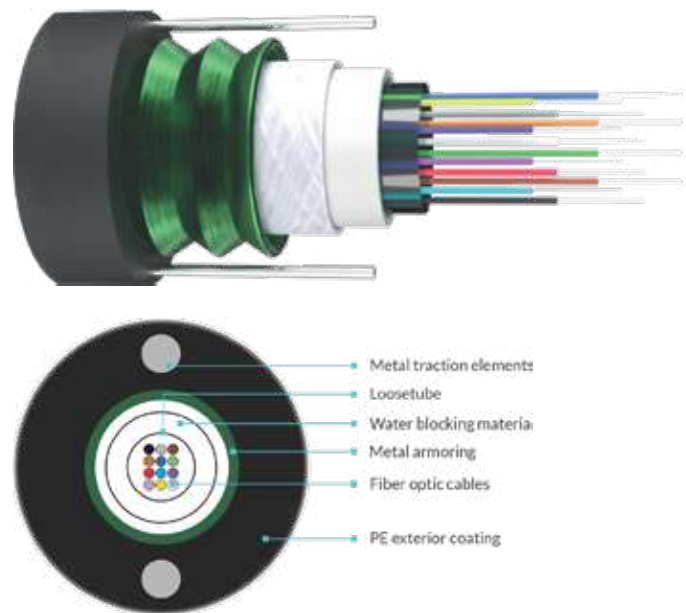

Description

FAB-GYXTW fiber cable is a suitable solution for aerial, duct, direct buried and pipe laying applications. Its main feature is the parallel metallic elements that improve tensile strength.

It is a compact, small diameter, flexible and lightweight cable, easy to install in the field. It has a corrugated steel metallic armor structure that provides resistance against crushing and protection against rodents, mainly in hostile outdoor environments. Inside, there are protection and filling elements designed to block water access.

Features

- Excellent crush resistance and flexibility
- Capacity up to 24 fibers in a central loose tube, type G.652D, G657A1 and G657A2, among other options.
- Excellent thermal performance

Standards

According to standard YD/769-2010.

Code	Fiber	Cable diameter (mm)	Cable weight (kg/Km)	Tensile Strength Long/Short term (N)	Resistance to crush resistance Long/Short term (N/1000mm)	Bending radius Dynamic / Static (mm)
FAB-GYXTW-2~12	2~12	8.0	64	600/1500	300/1000	20D/10D
FAB-GYXTW-14~24	14~24	8.3	72	600/1500	300/1000	20D/10D

Transport / Storage / Operating temperature - 40 °C~ + 70 °C.



Description

FAB-GYFXY fiber cable is a suitable solution for aerial and duct applications. Its main feature is the dielectric parallel elements that improve tensile strength.

It is a compact, small diameter, flexible and lightweight cable, easy to install in the field. Inside, it has a protection and filling element to block water access, in addition to a high density loose tube that stores up to 24 fibers.

Features

- Excellent crush resistance and flexibility
- Capacity up to 24 fibers in a central loose tube, type G.652D, G657A1 and G657A2, among other options.
- Excellent thermal performance


Standards

According to standard YD/769-2010.

Code	Fiber	Cable diameter (mm)	Cable weight (kg/Km)	Tensile Strength Long/Short term (N)	Resistance to crush resistance Long/Short term (N/1000mm)	Bending radius Dynamic / Static (mm)
FAB-GYFXY-2~12	2~12	7.5	48	600/1500	300/1000	25D/12.5D
FAB-GYFXY-14~24	14~24	8.0	55	600/1500	300/1000	25D/12.5D

Transport / Storage / Operating temperature - 40 °C~ + 70 °C.

Important: All cables can be adjusted according to the need of each project. Please consult with one of our specialists for the best cable option.

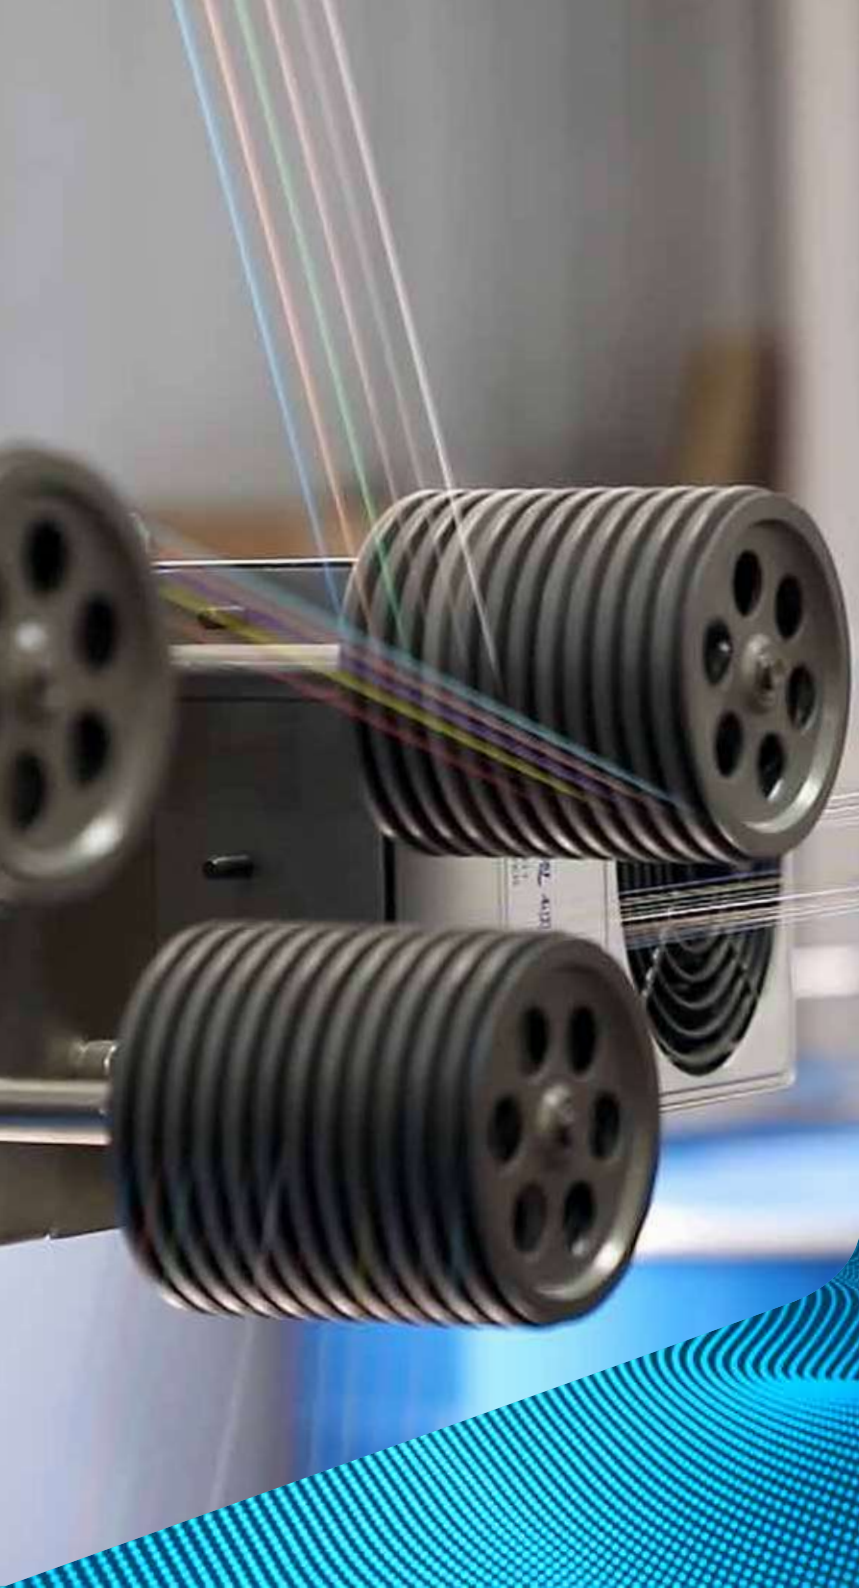

DESIGN AND PRODUCTION OF CUSTOM CABLES


Fibramérica's technical engineering team works to develop cables that best suit the needs of each project. To this end, we offer advice to our customers for the manufacture of custom cables, with the guarantee of working with top quality materials.

Our team of professionals has extensive market experience to support companies in identifying the best fiber optic cabling option for their company and/or project, through an analysis of technical requirements, design, type of use and applications of the cable, among other aspects.

We perform all types of marking and packaging so that your cables are presented in the best way. We can also offer special cable productions in reduced quantities with short delivery times for homologation processes and specific projects.

For more information or to discuss possible customized cabling solutions, please contact our technicians by e-mail at info@fibramerica.com.



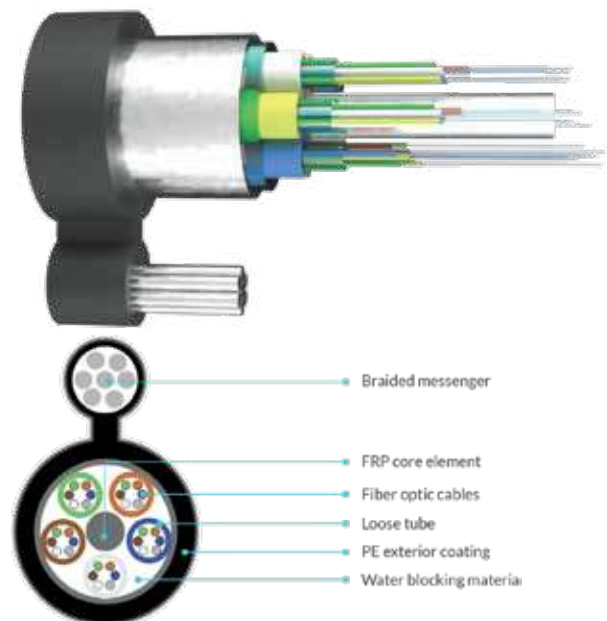

Description

Figure 8 cables feature moisture resistance and shock resistance characteristics. They are suitable for overhead applications. The metallic messenger is formed by stranded wires forming a unit, or a single metallic tube. This messenger is protected by a polyethylene (PE) jacket, so that the fiber cut looks like a figure 8. The interior is composed of loose tubes containing optical fibers, a water-blocking shield and a central tensile member. The impact structure ensures excellent mechanical and environmental performance.

Features


- Excellent crush resistance and flexibility
- Capacity up to 24 fibers in a central loose tube, type G.652D, G657A1 and G657A2, among other options.
- Excellent thermal performance

Standards

According to YD/T1155 -2001 and IEC60794 -1.

Code	Fiber	Tubes	Fillings	Cable diameter (mm)	Cable weight (kg/km)	Tensile Strength (Long/Short term) (N)	Resistance to crush resistance (Long/Short term) (N/1000mm)	Bending radius Dynamic / Static (mm)
FAB-GYTCBA/S-2-30	2~30	1~5	4~0	8.9x15.9	139/153	600/1500	300/1000	20D/10D
FAB-GYTCBA/S-32-36	32~36	6	0	9.2x16.2	147/163	600/1500	300/1000	20D/10D
FAB-GYTCBA/S-38-60	38~60	5~6	1~0	9.5x16.5	147/163	600/1500	300/1000	20D/10D
FAB-GYTCBA/S-62-72	62~72	6	0	10.0x17.0	163/179	600/1500	300/1000	20D/10D
FAB-GYTCBA/S-74-96	74~96	7~8	1~0	11.2x18.2	175/193	600/1500	300/1000	20D/10D

Transport / Storage / Operating temperature - 40 °C~ + 70 °C,

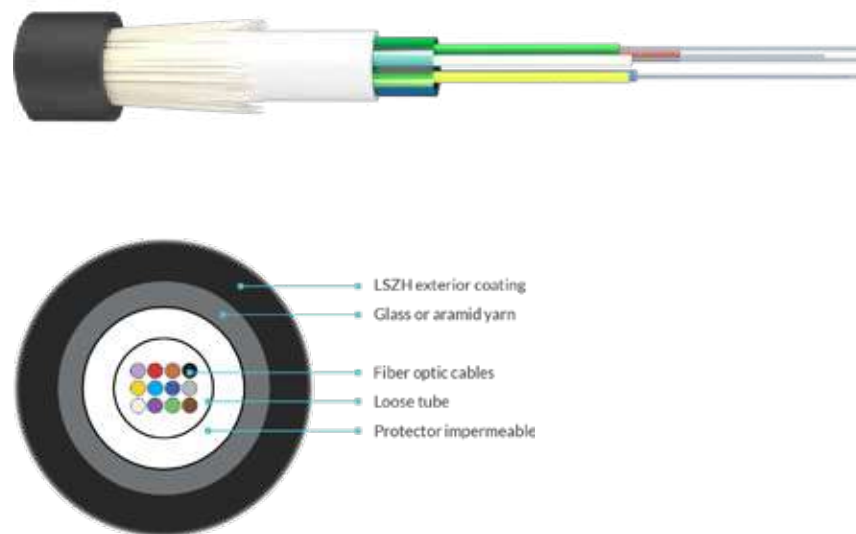

Description

The FAB-GYFXTH_G optical access cable has a simple structure, where the 250µm optical fiber is inserted into a loose loose tube made of high-strength material, and the loose tube is filled with waterproof compound to ensure water blocking. The loose tube is coated with a layer of glass fiber reinforced elements and extruded with a cover layer of low smoke, halogen-free, flame retardant (LSZH) material.

Features


- Good mechanical and thermal performance
- Loose tube with high resistance to hydrolysis
- Glass yarn ensures tensile strength
- Crush resistance and flexibility

Standards

According to standard YD/T1258.4-2005,ICEA-596,GR-409,IEC 60794,IEC 332-1 and IEC 332-3C.

Code	Fiber	Tubes	Fillings	Cable diameter (mm)	Cable weight (kg/km)	Tensile Strength (Long/Short term) (N)	Resistance to crush resistance (Long/Short term) (N/1000mm)	Bending radius Dynamic / Static (mm)
FAB-GYFXTH_G-2-12	2~12	6.0 ±0.3	2.5	43	139/153	200/660	300/1000	20D/10D
FAB-GYFXTH_G-14-24	14~24	6.0 ±0.3	3.0	48	147/163	400/1330	300/1000	20D/10D

Transport / Storage / Operating temperature - 40 °C~ + 70 °C,

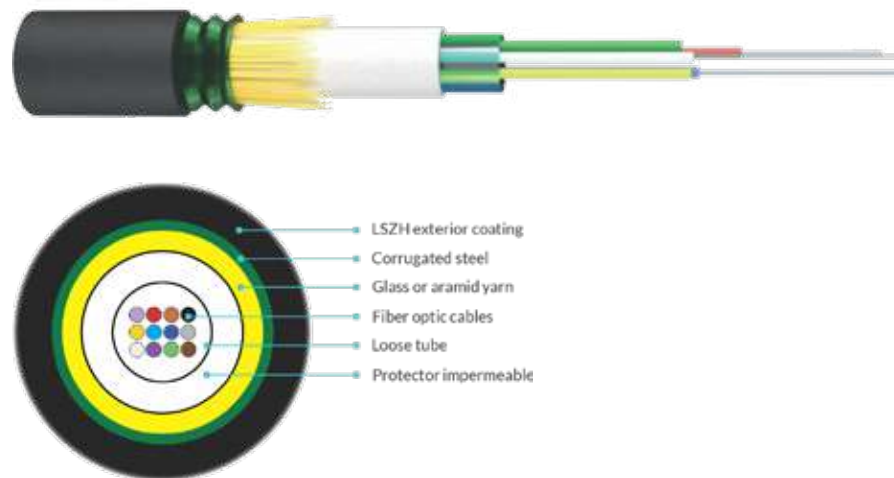

Description

The FAB-GJYFTZX_A optical access cable is similar to the FAB-GYFXTH_G cable, but with a corrugated steel metallic jacket that offers increased resistance against rodents and crushing. It has a simple structure, where the 250µm optical fiber is inserted into a loose tube made of high-strength material, and the loose tube is filled with waterproof compound to ensure water blocking. The loose tube is coated with a layer of glass fiber reinforced elements and extruded with a cover layer of low smoke, halogen-free, flame retardant (LSZH) material.

Features


- Good mechanical and thermal behavior
- Loose tube with high resistance to hydrolysis
- Aramid yarns ensure tensile strength
- PSP improves moisture resistance
- Small diameter, light weight and easy installation
- Long delivery length

Standards

According to standard YD/T1258.4-2005, IEC 60794, IEC 332-1 and IEC 332-3C.

Code	Fiber	Tubes	Fillings	Cable diameter (mm)	Cable weight (kg/km)	Tensile Strength (Long/Short term) (N)	Resistance to crush resistance (Long/Short term) (N/1000mm)	Bending radius Dynamic / Static (mm)
FAB-GJYFTZX-A-2-12	2~12	7.0 ± 0.5	2.5	63	200/660	300/1000	10D/20D	20D/10D
FAB-GJYFTZX-A-14-24	14~24	7.5 ± 0.5	3.0	70	400/1330	300/1000	10D/20D	20D/10D

Transport / Storage / Operating temperature - 40 °C ~ + 70 °C,

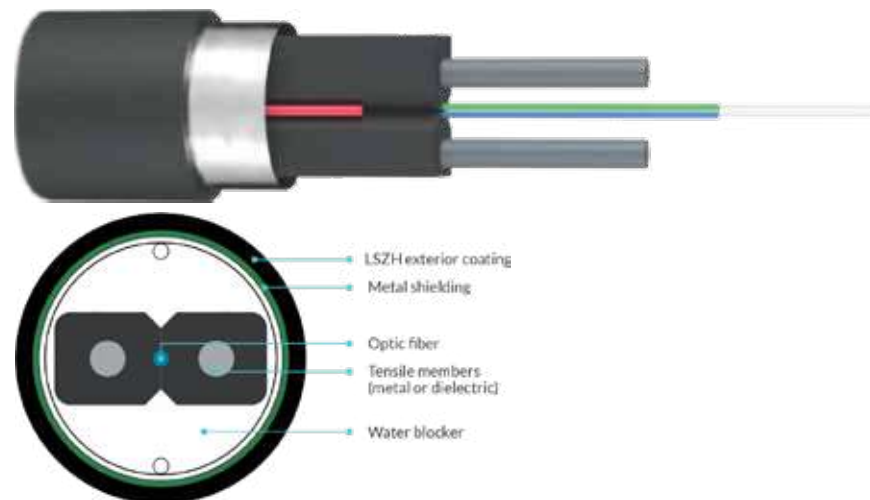

Description

This flat drop cable for duct allows quick and easy installation, reducing the effort and time spent in the field. With a simple and compact structure, the drop cable offers high reliability to your network. In addition, it represents a low installation and maintenance cost cable.

Its structure is defined by a core capable of supporting up to 4 BLI A - (ITU-T G.657) fibers that guarantee low loss levels in small bending radii (Microbending), avoiding fiber breakage during handling. Its traction members can be metallic or dielectric (FRP or KFRP). The outer jacket is designed with flame-retardant and low-smoke thermoplastic material, LSZH, resistant to UV rays.

Features

- Suitable for fiber: G652D / G657A1 / G657A2.
- Its outer diameter is 2x3mm without metal bearing.
- The diameter of its traction members is 0.45mm or 0.5mm, according to requirement.
- The diameter of the metal support is 1mm or 1.2mm, and can be galvanized or phosphated.
- 100% LSZH coating.
- Black color cover, with UV protection.
- Parallel traction members can be metallic or dielectric (FRP or KFRP).
- Simple structure with light weight, providing high practicability.
- Wood or plastic coils. Highly customizable packaging.


Standards

According to IEC60793-1, IEC60793-2, EIA/TIA598 B, ITU-T G.650, ITU-T G.657.

Code	Fiber	Cable diameter (mm)	Cable weight (kg/km)	Tensile Strength (Long/Short term) (N)	Resistance to crush resistance (Long/Short term) (N/1000mm)	Bending radius Dynamic / Static (mm)
GJYX(F)HA-1	1	Ø7.0	49	300/600	1000/2200	10D/20D
GJYX(F)HA-2	2	Ø7.0	49	300/600	1000/2200	10D/20D
GJYX(F)HA-4	4	Ø7.0	49	300/600	1000/2200	10D/20D
GJYX(F)HA-6	6	Ø7.0	49	300/600	1000/2200	10D/20D

Transport / Storage / Operating temperature - 20 °C ~ + 60 °C | Installation temperature - 5 °C ~ + 50 °C

Important: All cables can be adjusted according to the need of each project. Please consult with one of our specialists for the best cable option.

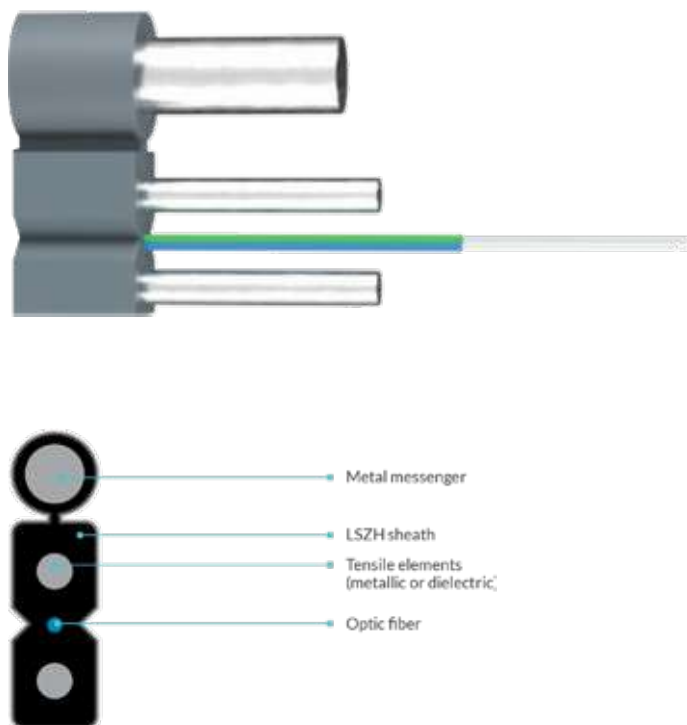

Description

This flat drop cable allows quick and easy installation, reducing the effort and time spent in the field. With a simple and compact structure, the drop cable offers high reliability to your network. In addition, it represents a low installation and maintenance cost cable.

Its structure is defined by a core capable of supporting up to 4 BLI A - (ITU-T G.657) fibers that guarantee low loss levels in small bending radii (Microbending), avoiding fiber breakage during handling. Its traction members can be metallic or dielectric (FRP or KFRP). The metallic support facilitates the suspension of the cable. The outer jacket is designed with flame-retardant, low-smoke, LSZH, UV-resistant thermoplastic material.

Features

- Suitable for fiber: G652D / G657A1 / G657A2.
- Its outer diameter is 2x5mm with metal carrier.
- The diameter of its traction members is 0.45mm or 0.5mm, according to requirement.
- The diameter of the metal support is 1mm or 1.2mm, and it can be galvanized or phosphated.
- 100% LSZH coating.

Estructure	Unit	Parameter
Number of fibers	Quantity	1, 2 o 4 fibers
	Type	G657A2
Traction members	Material	Metalic, FRP or KFRP
	Diameter	0.45mm x 2 pcs
Cover	Material	LSZH
Metal messenger	Material	Phosphatized or galvanized
	mm	1mm or 1,2mm
Cable size	mm	5x2mm
Radius of curvature	Dynamic	$\geq 20 \times$ cable diameter
	Static	$\geq 10 \times$ cable diameter
Operating temperature range	°C	-10 ~ +60
Installation temperature range	°C	-10 ~ +60
Transport and storage temperature range	°C	-10 ~ +60
Max. tensile load	N	600
Crush resistance	N	2000/10cm



- Black color cover, with UV protection.
- Parallel traction members can be metallic or dielectric (FRP or KFRP).
- Simple structure with light weight, providing high practicability.
- Wood or plastic coils. Highly customizable packaging.

Standards

Según la norma IEC60793-1, IEC60793-2, EIA/TIA598 B, ITU-T G.650, ITU-T G.657.

Note: The drop cable reels are made of wood, protected by a soft cardboard box. The standard length of each reel is 1000 meters of drop cable. During transport, suitable tools should be used to avoid damaging the packaging and to handle its transport with ease. Cables should be protected from moisture; keep away from high temperature sparks and contact with fire; protect from bending and crushing. Protect from mechanical stress and damage.

The printing on the cable is done in white color, which are printed in 1 meter intervals with the factory standard information. The labels accompanying the wooden spools contain the following information: cable type, fiber quantity, length, gross weight, spool number, year of manufacture. All spools have their test report.

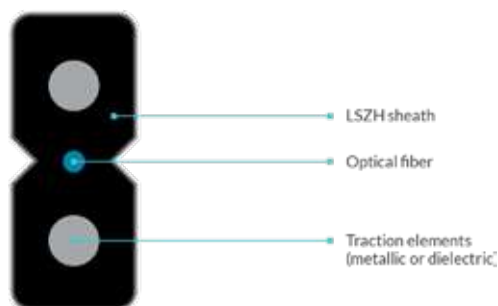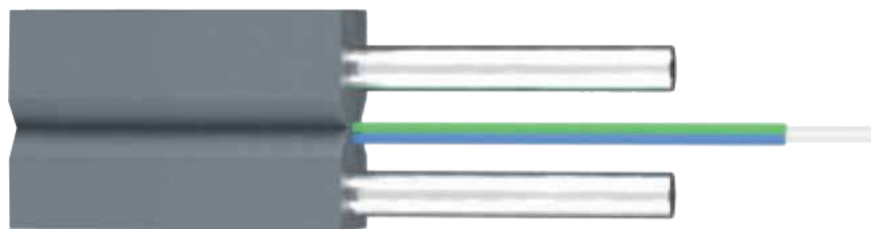

Description

This flat drop cable allows quick and easy installation, reducing the effort and time spent in the field. With a simple and compact structure, the drop cable offers high reliability to your network. In addition, it represents a low installation and maintenance cost cable.

Its structure is defined by a core capable of supporting up to 4 BLI A - (ITU-T G.657) fibers that guarantee low loss levels in small bending radii (Microbending), avoiding fiber breakage during handling. Its traction members can be metallic or dielectric (FRP or KFRP). The metallic support facilitates the suspension of the cable. The outer jacket is designed with flame-retardant, low-smoke, LSZH, UV-resistant thermoplastic material.

Features

- Suitable for fiber: G652D / G657A1 / G657A2.
- Its outer diameter is 2x3mm without metal bearing.
- The diameter of its traction members is 0.45mm or 0.5mm, according to requirement.
- The diameter of the metal support is 1mm or 1.2mm, and can be galvanized or phosphated.
- 100% LSZH coating.
- Black color cover, with UV protection.

Estructure	Unit	Parameter
Number of fibers	Quantity	1, 2 o 4 fibers
	Type	G657A2
Traction members	Material	Metalic, FRP or KFRP
	Diameter	0.45mm x 2 pcs
Cover	Material	LSZH
Cable size	mm	3x2mm
Radius of curvature	Dynamic	$\geq 20 \times$ cable diameter
	Static	$\geq 10 \times$ cable diameter
Operating temperature range	°C	-10 ~ +60
Installation temperature range	°C	-10 ~ +60
Transport and storage temperature range	°C	-10 ~ +60
Max. tensile load	N	80
Crush resistance	N	1000/10cm

- Parallel traction members can be metallic or dielectric (FRP or KFRP).
- Simple structure with light weight, providing high practicability.
- Wood or plastic coils. Highly customizable packaging.

Standards


According to IEC60793-1, IEC60793-2, EIA/TIA598 B, ITU-T G.650, ITU-T G.657.

Note: The drop cable reels are made of wood, protected by a soft cardboard box. The standard length of each reel is 1000 meters of drop cable. During transport, suitable tools should be used to avoid damaging the packaging and to handle its transport with ease. Cables should be protected from moisture; keep away from high temperature sparks and contact with fire; protect from bending and crushing. Protect from mechanical stress and damage.

The printing on the cable is done in white color, which are printed in 1 meter intervals with the factory standard information. The labels accompanying the wooden spools contain the following information: cable type, fiber quantity, length, gross weight, spool number, year of manufacture. All spools have their test report.

Important: All cables can be adjusted according to the need of each project. Please consult with one of our specialists for the best cable option.

Flat Cable Drop For Duct FAB-GJFJV-H

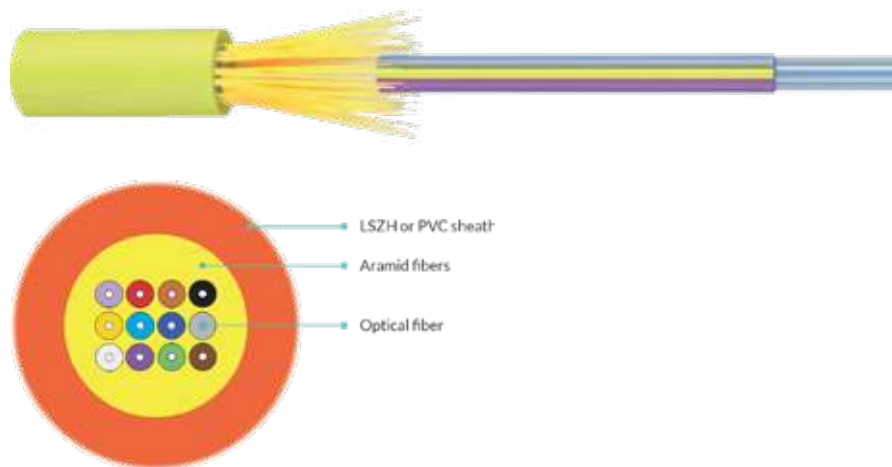

Description

The fiber optic distribution cable has a tight structure with 0.9mm sheathing, glass fiber or Kevlar tensile elements (depending on the requirement) and sheathing generally LSZH, although it can also be manufactured in other types of materials depending on the project.

This type of cable is mostly used for indoor distribution, both for transverse and horizontal applications, as it has a compact and flexible size. It also allows direct termination of connectors, saving installation time and reducing connection costs.

Features

- Small size flexible cable, ideal for indoor installations.
- Suitable for direct connectorization on the cable fibers without using pigtails.
- Tight-buffer structure with capacity up to 48 fibers.
- High-strength aramid yarns


Standards

Complies with standard 1258.4-2005, ICEA-596, GR-409, IEC 60794-2-20/21, etc.; and meets UL approval requirements for OFNR.

Code	Cable diameter (mm)	Cable weight (kg/km)	Tensile Strength (Long/Short term) (N)	Resistance to crush resistance (Long/Short term) (N/1000mm)	Bending radius Dynamic / Static (mm)	Cover material
FAB-GJFJV (H) -04	4.8	20	400/1320	300/1000	20D/10D	PVC/LSZH
FAB-GJFJV (H) -06	5.0	22	400/1320	300/1000	20D/10D	PVC/LSZH
FAB-GJFJV (H) -08	5.5	26	400/1320	300/1000	20D/10D	PVC/LSZH
FAB-GJFJV (H) -12	6.5	32	400/1320	300/1000	20D/10D	PVC/LSZH
FAB-GJFJV (H) -24	8.5	54	400/1320	300/1000	20D/10D	PVC/LSZH
FAB-GJFJV (H) -48	10.5	85	400/1320	300/1000	20D/10D	PVC/LSZH

Transport / Storage / Operating temperature - 20 °C~ + 60 °C | Installation temperature - 5 °C~ + 50 °C

Distribution Cable FAB-GJPFJV-H

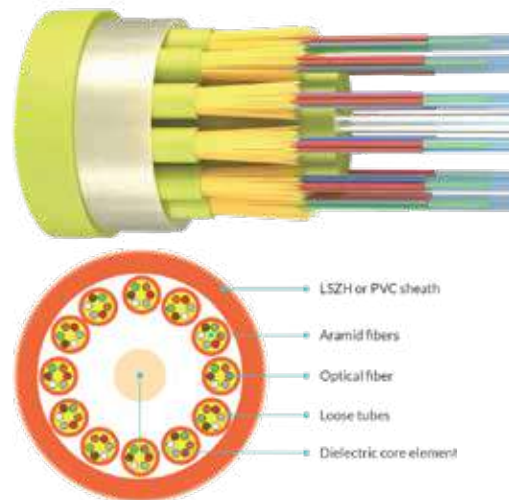

Description

FAB-GJPFJV multi-purpose optical cable uses multi-core subunits (Ø900um tight buffered optical fiber, aramid fiber reinforced components), non-metallic reinforced central core, the optical cable subunits are overlapped over the reinforced central core to form a cable core. The outer jacket is LSZH type (low smoke, halogen free, flame retardant) for indoor installations.

Features

- The structure of the non-metallic resistance elements guarantees a higher tensile strength of the cable.
- Compact structure with high capacity and fiber density.
- The sheath is anti-corrosion, anti-water, anti-ultraviolet radiation, flame retardant and environmentally friendly, etc.
- The whole dielectric structure protects it from electromagnetic influence.

Standards

According to YD standard (T 1258.4-2005, ICEA-596, GR-409, IEC 60794-2-20 /21, IEC 3221-1 and IEC332-3C).

Code	Cable diameter (mm)	Cable weight (kg/km)	Tensile Strength (Long/Short term) (N)	Resistance to crush resistance (Long/Short term) (N/1000mm)	Bending radius Dynamic / Static (mm)	Cover material
FAB-GJPFJV-024	10.4 ± 0.5	96	400/1320	300/1000	20D/10D	PVC/LSZH
FAB-GJPFJV-030	12.4 ± 0.5	149	400/1320	300/1000	20D/10D	PVC/LSZH
FAB-GJPFJV-036	13.5 ± 0.5	185	400/1320	300/1000	20D/10D	PVC/LSZH
FAB-GJPFJV-048	15.7 ± 0.5	265	400/1320	300/1000	20D/10D	PVC/LSZH
FAB-GJPFJV-060	18.0 ± 0.5	350	400/1320	300/1000	20D/10D	PVC/LSZH
FAB-GJPFJV-072	20.5 ± 0.5	440	400/1320	300/1000	20D/10D	PVC/LSZH
FAB-GJPFJV-096	20.5 ± 0.5	448	400/1320	300/1000	20D/10D	PVC/LSZH

Transport / Storage / Operating temperature - 20 °C~ + 60 °C | Installation temperature - 5 °C~ + 50 °C





FIBRAMÉRICA | Mingqing Fibramerica Technology Co., Ltd
No 42, Baijin East Road, Baijin Industrial Park,
Baizhong Town, Mingqing County, Fuzhou, Fujian, China
Phone: +86 18621754882

Office in America
Rua Arthur Max Dôse, 153, Sala 1302
Balneário Camboriú - Brazil - Phone: (+55) 47 2033 2231
Contact: comercial@fibramerica.com